
Product Catalog




PRESSURE SENSITIVE • SEW-ON • CABLE MANAGEMENT SPECIALTY HOOK & LOOP • STRAPS • RETAIL PACKS




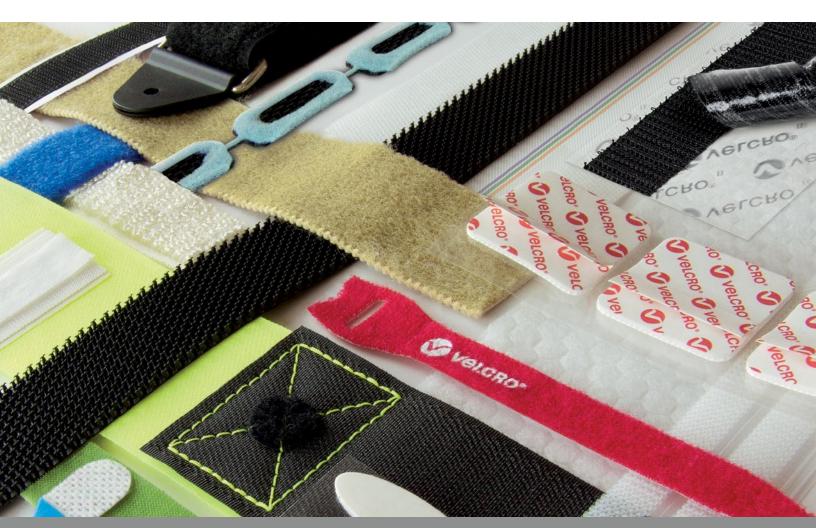

Pressure Sensitive







Sew-On








Cable Management





Specialty Hook & Loop







Straps







Retail Packs








Table of Contents



Pressure Sensitive





Sew-Or

Hook 88	18
Loop 1000	18
Hook 89	18
Loop 1100	19
Hook 65	19
Loop 2000	19
Hook 81	20
Loop 9000	20
VELCOIN®	20
Hook 705	21
Hook 805	21
Hook 711	21
Hook 811	22
Loop 3905	22
Loop 3610	22
Loop 3003	23



Cable Management

ONE-WRAP®	26
ONE-WRAP® Strap	26
ONE-WRAP® - FR	26
ONE-WRAP® Strap - FR	27
QWIK TIE	27
QWIK TIE Straps	27
BUNDLE TIES	28



Specialty Hook & Loop

MOLDED HOOK Hook 511.....

Hook 757.

HEAT, SOLVENT & WELDABLE FASTENERS	
Loop 1000	
Hook 88	
Hook 848	
Knit Loop 360733	

ELASTIC LOOP

VELSTRETO	CH® Loop	151	34
Loop 152			34

FR & HIGH TEMPERATURE

HI-AIR® Hook 66	34
HI-AIR® Loop 3000	35
HI-GARDE® Hook 46	35
HI-GARDE® Loop 8000	35

WOVEN

VEL-LOC®	8783	36

DISPLAY

VELTEX® Laminated	Loop	3	6
-------------------	------	---	---

HARDWARE

/FLSTICK®	37



Straps

VELSTRAP®	40
LOGISTRAP™	40



Retail Packs


90070

STICKY BACK 5/8" Coins	44
90081 STICKY BACK 15' x ¾" Tape	44
90082 STICKY BACK 15' x ¾" Tape	44
90197 INDUSTRIAL STRENGTH 15' x 2" Tape	45
90198 INDUSTRIAL STRENGTH 15' x 2" Tape	45
90924 ONE-WRAP® Thin Ties 8" x ½"	45
91140 ONE-WRAP® Thin Ties 8" x ½"	46
01365	

INDUSTRIAL STRENGTH EXTREME 10' x 1" Tape 46



Pressure Sensitive

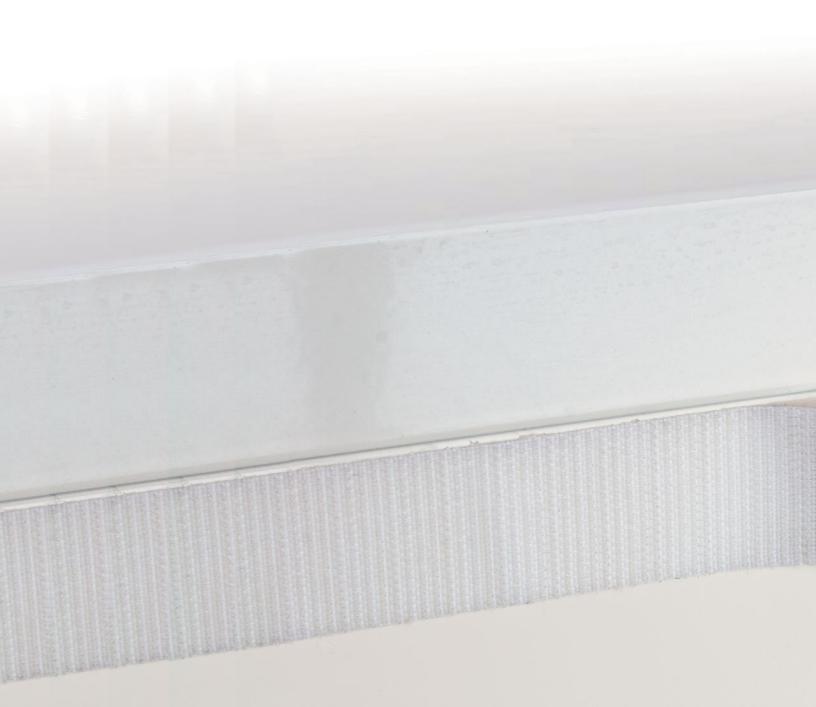





Hook 88

Apparel, cable management, polishing discs, mop heads, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 15, 19, 72

Cycle life: High

Suggested mating component: Loop 1000







Loop 1000

Apparel, cable management, polishing discs, mop heads, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 15, 19, 72

Cycle life: High

Suggested mating component: Hook 88









Hook 89

Professional apparel (military, firefighters, etc.), mop heads, applications requiring IR resistance.

Base material: Nylon

Standard colors: Black, tan, coyote, foliage green

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 19, 72

Cycle life: High

Suggested mating component: Loop 1100























Pressure Sensitive

VELCRO® Brand

Loop 1100

Professional apparel (military, firefighters, etc.), mop heads, applications requiring IR resistance.

Base material: Nylon

Standard colors: Black, tan, coyote, foliage green

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

 $\textbf{Adhesive type:}\ 19,72$

Cycle life: High

Suggested mating component: Hook 89









VELCRO® Brand

Hook 65

Apparel, cable management, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

 $\textbf{Adhesive type:}\ 15,\ 19,\ 72$

Cycle life: High

Suggested mating component: Loop 2000







VELCRO® Brand

Loop 2000

 $\label{lem:polishing} \begin{tabular}{ll} Apparel, cable management, polishing diskes, mop heads, orthopedics, seat trim, aviation, furnishings, straps. \end{tabular}$

Base material: Nylon

Standard colors: Black

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

 $\textbf{Adhesive type:}\ 15,\ 19,\ 72$

Cycle life: High

Suggested mating component: Hook 88











Hook 81

Apparel, outdoor applications, other applications requiring weather (UV and moisture) resistance.

Base material: Polyester

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 13, 72

Cycle life: Medium

Suggested mating component: Loop 9000 Polyester





VELCRO® Brand

Loop 9000

Apparel, outdoor applications, other applications requiring weather (UV and moisture) resistance.

Base material: Polyester

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 13, 72

Cycle life: Medium

Suggested mating component: Hook 081 Polyester







VELCRO® Brand

VELCOIN®

Apparel, office folders, stationery, rigid packaging and trays, bag closure.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 7/8, 1-3/8, 1-7/8

Standard put-ups (yards): 25 yd roll

Adhesive type: 72

Cycle life: High

Suggested mating component: Hook 88, Loop 1000











Hook 705

Adjustable straps, signage, POP, displays.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 50 yd roll

Adhesive type: 15, 19, 72 Cycle life: High / Medium

Suggested mating component: Loop 1000, Loop 3003





VELCRO® Brand

Hook 805

Polishing discs, headgear, orthopaedic braces, helmets, molding, RF weldable.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 50 yd roll

Adhesive type: 15, 19, 72 Cycle life: High / Medium

Suggested mating component: Loop 3610







VELCRO® Brand

Hook 711

Medical applications, sports equipment.

Base material: Polyethylene

Standard colors: Black, white, natural

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 15, 19 Cycle life: Medium / Low

Suggested mating component: Loop 3003, Loop 3200













Hook 811

Medical disposable, sterialize goods, single use straps, economical.

Base material: Polyethylene Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 50 yd roll

Adhesive type: 15, 19 Cycle life: Medium / Low

Suggested mating component: Loop 3905, Loop 3610





VELCRO® Brand

Loop 3905

Medical, orthopedic braces, blood pressure cuffs, supports, sports apparel, cleaning products.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2

Standard put-ups (yards): 100 yd roll, 250 yd roll

Adhesive type: 19, 72

Cycle life: Low

Suggested mating component: Hook 830, Hook 811







VELCRO® Brand

Loop 3610

Medical, orthopedic braces, blood pressure cuffs, supports, sports apparel, cleaning products.

Base material: Nylon

Standard colors: Black, white, beige

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4 Standard put-ups (yards): 50 yd roll, 100 yd roll

Adhesive type: 19, 72 Cycle life: Medium

Suggested mating component: Hook 845, Hook 811









Pressure Sensitive

VELCRO® Brand

Loop 3003

Medical, orthopedic braces, supports, sports apparel, cleaning products, displays.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 40 yd roll, 60 yd roll

Cycle life: High / Medium

Suggested mating component: Hook 88









Pressure Sensitive Adhesives

Pressure sensitive adhesives are popular because of the ease of application. Simply remove the release liner and press the VELCRO® Brand tape in place. Pressure sensitive adhesives should always be considered semi-permanent bonds. VELCRO® Brand pressure sensitive adhesives have been engineered to offer specific performance characteristics to meet different requirements.

Acrylic: Pressure sensitive adhesives offer up to 225°F short-term heat resistance as well as good shear strength and good adhesion to most metal and medium / high surface energy plastics.

Rubber: Pressure sensitive adhesive offers up to 185°F short-term heat resistance as well as good adhesion to low surface energy substrates. They should be used indoors, at room temperature.

Fire retardant: Fire retardant pressure sensitive adhesives are suitable for use in applications requiring certification to industry specifications, such as automotive.









	ACRYI	_IC	SYNTHETIC RUBBER		FIRE RETARDANT		RDANT	
CHARACTERISTICS	Adhesive 72	Adhesive 75	Adhesive 13	Adhesive 15	Adhesive 19	Adhesive 32	Adhesive 8219	Adhesive 8224
TACK	Mod	erate	High			High		
BOND STRENGTH		bond strength in ength in 24 hours	Achieves 80% bond strength in an hour. Full strength in 24 hours				Achieves 80% bond strength in an hour. Full strength in 24 hours	
TEMPERATURE OPERATING RANGE	-30°F to 140°F			-30°F t	o 110°F		Tempe operating range	erature -30°F to 110°F
APPLICATION METHOD	Pressure			Pressure		Pres	ssure	
SHORT-TERM HEAT RESISTANCE	225°F			185°F		18	5°F	
SPECIAL FEATURES		-			-		Certified to FAR 25.853 60 second burn test for nylon hook and loop and 12 second burn test for polyester hook and loop	Certified to BMS 8-285 60 second burn test for nylon hook and loop and 12 second burn test for polyester hook and loop*


^{*}Only available to Boeing companies. All others will be certified to equivalent FAR 25.853 vertical burn tests.

Solvent and Heat Activated Adhesives Permanent

Solvent and heat activated adhesives, available on most VELCRO® Brand hook and loop tapes, provide the strongest bond to the tape itself and can be made ready for instant bonding by many easy methods of application (e.g. solvent, heat, ultrasonic, dielectric).

Solvent: Solvent activated adhesives are recommended for applications where a more permanent bond is desired. Dry to the touch, these adhesives become tacky upon activation using solvents.

Heat Activated: Heat activated adhesives are recommended for applications where a more permanent bond is desired. Dry to the touch, these adhesives become tacky upon activation using RF welding or ironing.



	SOLVENT	HEAT ACTIVATED			
CHARACTERISTICS	**Adhesive 40	**Adhesive 43			
BOND STRENGTH	Ultimate bond strength is achieved in 24 hours	Ultimate bond strength is achieved in 24 hours			
TEMPERATURE OPERATING RANGE	-40° F to 250° F	-40° F to 160° F			
APPLICATION METHOD	MEK, acetone or MCL. Liquid adhesive or ultrasonically welded (porous substrates).	Ultrasonic and dielectric (RF), machinery, iron-on heat, other heat generating equipment.			

^{**}Additional testing is needed to verify these values.



Recommended Substrates

Ī	

edium



SUBSTRATE	ADHESIVE	ADDITIONAL INFORMATION	
ALUMINUM	13, 15, 19, 32, 35, 72, 75	Depending on Operating Environment	
STAINLESS STEEL	13, 15, 19, 32, 35, 72, 75	Depending on Operating Environment	
COPPER	13, 15, 19, 32, 35, 72, 75	Depending on Operating Environment	
GLASS	13, 15, 19, 32, 35, 72, 75	Depending on Operating Environment	
NYLON	72, 75		
POLYESTER	72, 75		
POLYURETHANE	72, 75		
ABS	72, 75		
POLYCARBONATE	72, 75		
ACRYLIC	72, 75		
PVC	72, 75		
PET	72, 75		
POLYSTYRENE	13, 15, 19, 32, 35		
PVA	13, 15, 19, 32, 35		
EVA	13, 15, 19, 32, 35		
POLYETHYLENE	13, 15, 19, 32, 35		
POLYPROPYLENE	13, 15, 19, 32, 35		
PTFE	13, 15, 19, 32, 35		
PVDF	13, 15, 19, 32, 35		
SILICONE	13, 15, 19, 32, 35		

Adhesives











Hook 88

Apparel, cable management, polishing discs, mop heads, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Cycle life: High

Suggested mating component: Loop 1000





VELCRO® Brand

Loop 1000

Apparel, cable management, polishing discs, mop heads, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Cycle life: High

Suggested mating component: Hook 88







VELCRO® Brand

Hook 89

Professional apparel (military, firefighters, etc.), mop heads, applications requiring IR resistance.

Base material: Nylon

Standard colors: Black, tan, coyote, foliage green

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Cycle life: High

Suggested mating component: Loop 1100















Loop 1100

Professional apparel (military, firefighters, etc.), mop heads, applications requiring IR resistance.

Base material: Nylon

Standard colors: Black, tan, coyote, foliage green

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Cycle life: High

Suggested mating component: Hook 89









VELCRO® Brand

Hook 65

Apparel, cable management, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Cycle life: High

Suggested mating component: Loop 2000







VELCRO® Brand

Loop 2000

Apparel, cable management, polishing discs, mop heads, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Cycle life: High

Suggested mating component: Hook 88









Hook 81

Apparel, outdoor applications, other applications requiring weather (moisture and UV) resistance.

Base material: Polyester

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 25 yd roll

Cycle life: Medium

Suggested mating component: Loop 9000 Polyester





VELCRO® Brand

Loop 9000

Apparel, outdoor applications, other applications requiring weather (moisture and UV) resistance.

Base material: Polyester

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 25 yd roll

Cycle life: Medium

Suggested mating component: Hook 081 Polyester







VELCRO® Brand

VELCOIN®

Apparel, office folders, stationery, rigid packaging and trays, bag closure.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 7/8, 1-3/8, 1-7/8

Standard put-ups (yards): 25 yd roll

Cycle life: High

Suggested mating component: Hook 88, Loop 1000











Hook 705

Adjustable straps, signage, POP, displays.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 50 yd roll

Cycle life: High / Medium

Suggested mating component: Loop 1000, Loop 3003





VELCRO® Brand

Hook 805

Polishing discs, headgear, orthopaedic braces, helmets, moulding, RF weldable.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 50 yd roll

Cycle life: High / Medium

Suggested mating component: Loop 3610







VELCRO® Brand

Hook 711

Medical applications, sports equipment.

Base material: Polyethylene

Standard colors: Black, white, natural

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 25 yd roll

Cycle life: Medium / Low

Suggested mating component: Loop 3003, Loop 3200













Hook 811

Medical disposable, sterialize goods, single use straps, economical.

Base material: Polyethylene

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 50 yd roll

Cycle life: Medium / Low

Suggested mating component: Loop 3905, Loop 3610







Loop 3905

Medical, orthopedic braces, blood pressure cuffs, supports, sports apparel, cleaning products.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2

Standard put-ups (yards): 100 yd roll, 250 yd roll

Cycle life: Low

Suggested mating component: Hook 830, Hook 811









Loop 3610

Medical, orthopedic braces, blood pressure cuffs, supports, sports apparel, cleaning products.

Base material: Nylon

Standard colors: Black, white, beige

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4 Standard put-ups (yards): 50 yd roll, 100 yd roll

Cycle life: Medium

Suggested mating component: Hook 845, Hook 811













Loop 3003

Medical, orthopedic braces, supports, sports apparel, cleaning products, displays.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 40 yd roll, 60 yd roll

Cycle life: High / Medium

Suggested mating component: Hook 88










Cable Management

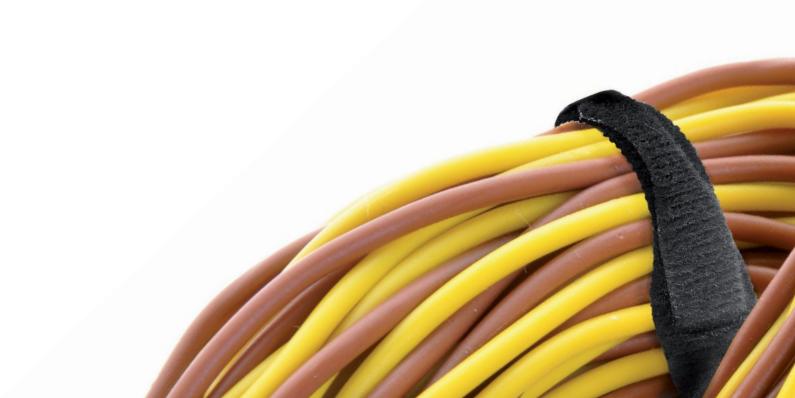





ONE-WRAP®

Cable/wire management, electrical wires, adjustable straps, materials handling.

Base material: Polyethylene / Nylon Knit

Standard colors: Black (330), white (010), beige (200), royal blue (155), light grey (300), red (520), coachman green (650), yellow (750), purple (557), brown (250)

Standard widths (inches): 3/8, 1/2, 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 25 yd roll, 150 yd roll, 200 yd roll

Adhesive type: N/A Cycle life: Medium

Suggested mating component: Self-engaging

















ONE-WRAP® Strap

Cable/wire management, electrical wires, adjustable straps, materials handling.

Base material: Polyethylene / Nylon Knit

Standard colors: Black (330), white (010), beige (200), royal blue (155), light grey (300), red (520), coachman green (650), yellow (750), purple (557), brown (250)

Standard widths (inches): 1/2 x 8, 1/2 x 10, 3/4 x 5, 3/4 x 6, 3/4 x 8, 3/4 x 12, 3/4 x 18, 1 x 8, 1 x 12, 1-3/4 x 23-1/2

Standard put-ups (yards): 25 yd roll, 150 yd roll, 200 yd roll

Adhesive type: N/A Cycle life: Medium

Suggested mating component: Self-engaging















VELCRO® Brand

ONE-WRAP® - FR

Plenum rated, cable/wire management, electrical wires, materials handling.

Base material: Polypropylene / Nylon Knit

Standard colors: Black (330), cranberry

Standard widths (inches): 3/8, 1/2, 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 25 yd roll, 150 yd roll, 200 yd roll

Adhesive type: N/A Cycle life: Medium

Suggested mating component: Self-engaging









ONE-WRAP® Strap - FR

Plenum rated, cable/wire management, electrical wires, adjustable straps, materials handling.

Base material: Polyethylene / Nylon Knit

Standard colors: Black (330), cranberry

Standard widths (inches): 1/2 x 8, 1/2 x 10, 3/4 x 5, 3/4 x 6, 3/4 x 8, 3/4 x

12, 3/4 x 18, 1 x 8, 1 x 12, 1-3/4 x 23-1/2

Standard put-ups (yards): 25 yd roll, 150 yd roll, 200 yd roll

Adhesive type: N/A

Cycle life: Medium

Suggested mating component: Self-engaging





QWIK TIE

Cable/wire management, electrical wires, materials handling, printable.

Base material: Polyethylene / Nylon

Standard colors: Black (330), white (010), red (514), gray (303)

Standard widths (inches): 1/2, 5/8, 3/4, 1

Standard put-ups (yards): 25 yd roll

Adhesive type: N/A Cycle life: Medium

Suggested mating component: Self-engaging









VELCRO® Brand

QWIK TIE Straps

Cable/wire management, electrical wires, materials handling, printable.

Base material: Polyethylene / Nylon

Standard colors: Black (330), white (010), red (514), gray (303)

Standard widths (inches): 3/4 x 5, 3/4 x 6, 3/4 x 8, 3/4 x 12

Standard put-ups (yards): 25 yd roll

Adhesive type: N/A Cycle life: Medium

Suggested mating component: Self-engaging















BUNDLE TIES

Cable/wire management (disposable), agriculture, produce bundling, gardening, single-use straps.

Base material: Polypropylene / polyester nonwoven

Standard colors: Black (330), white (010), emerald green (632),

moss green (684)

Standard widths (inches): 1/2, 5/8, 3/4, 1

Standard put-ups (yards): 10 yd roll, 30 yd roll, 38.5 yd roll, 50 yd roll

Adhesive type: N/A

Cycle life: Low

Suggested mating component: Self-engaging











Cable Management





Specialty Hook and Loop







Specialty Hook & Loop Molded Hook

VELCRO® Brand

Hook 511

Molded Hook designed for applications which require higher peel and shear strength.

Base material: Nylon

Standard colors: Black, natural Standard widths (inches): 1"

Standard put-ups (yards): 25 yd roll

Adhesive type: 15, 72

Cycle life: Medium / Low

Suggested mating component: Loop 1000





VELCRO® Brand

Hook 757

Molded Hook designed for strong hook engagement. RV panels, attach scrubbing pads, ceiling panels.

Base material: Nylon

Standard colors: Black

 $\textbf{Standard widths (inches):}\ 5/8,\ 3/4,\ 1,\ 1\text{-}1/2,\ 2,\ 4$

Standard put-ups (yards): 25 yd roll

 $\textbf{Adhesive type:}\ 15,\ 72$

Cycle life: Low

Suggested mating component: Loop 1000, Loop 3001



VELCRO® Brand

Loop 1000

Apparel, cable management, polishing discs, mop heads, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 40 (solvent), 43 (heat)

Cycle life: High

Suggested mating component: Hook 88









Specialty Hook & Loop Heat, Solvent or Weldable







Specialty Hook & Loop

Heat, Solvent or Weldable

VELCRO® Brand

Hook 88

Apparel, cable management, polishing discs, mop heads, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll Adhesive type: 40 (solvent), 43 (heat)

Cycle life: High

Suggested mating component: Loop 1000





VELCRO® Brand

Hook 848

Blood pressure cuffs, vinyl pouches. Other applications requiring welding onto vinyl substrates.

Base material: Vinyl

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4, 12

Standard put-ups (yards): 50 yd roll

Adhesive type: N/A

Cycle life: High / Medium

Suggested mating component: Loop 3607







VELCRO® Brand

Knit Loop 3607

Blood pressure cuffs, vinyl pouches. Other weldable applications onto vinyl substrates.

Base material: Nylon / Backing PVC film

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4, 50

Standard put-ups (yards): 50 yd roll

Adhesive type: N/A Cycle life: Medium


Suggested mating component: Hook 848













VELSTRETCH® Loop 151

Elastic straps, fetal monitor, headgear, orthopedic immobilizers, straps.

Base material: Nylon, elastomer

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2 Standard put-ups (yards): 25 yd roll, 40 yd roll

Adhesive type: N/A

Cycle life: High / Medium

Suggested mating component: Hook 65





VELCRO® Brand

Loop 152

Medical applications, sports equipment.

Base material: Nylon / Spandex

Standard colors: Black, white

Standard widths (inches): 1, 1-1/2, 2

Standard put-ups (yards): 25 yd roll

Adhesive type: N/A

Cycle life: Medium / Low

Suggested mating component: Hook 88, Hook 745





Specialty Hook & Loop FR & High Temperature



HI-AIR® Hook 66

$Self-extinguishing\ garments,\ military\ apparel,\ transportation\ interiors.$

Base material: Nylon, NOMEX® fibers

Standard colors: Natural

Standard widths (inches): 1, 2

Standard put-ups (yards): 50 yd roll

Adhesive type: 72

Cycle life: High

Suggested mating component: HI-AIR® Loop 3000











Specialty Hook & Loop FR & High Temperature

VFI CRO® Brand

HI-AIR® Loop 3000

Self-extinguishing garments, military apparel, transportation interiors.

Base material: Nylon, NOMEX® fibers

Standard colors: Natural
Standard widths (inches): 1, 2
Standard put-ups (yards): 50 yd roll

Adhesive type: 72

Cycle life: Medium

Suggested mating component: HI-AIR® Hook 66





VELCRO® Brand

HI-GARDE® Hook 46

Heat and chemical resistant applications.

Base material: Stainless Steel

Standard colors: Steel Grey

Standard widths (inches): $\boldsymbol{1}$

Standard put-ups (yards): 75 ft roll

 $\textbf{Adhesive type:} \ N/A$

Cycle life: Low

Suggested mating component: HI-GARDE® Loop 8000





VELCRO® Brand

HI-GARDE® Loop 8000

Heat and chemical resistant applications.

Base material: Stainless Steel

Standard colors: Steel Grey

Standard widths (inches): $\boldsymbol{1}$

Standard put-ups (yards): 75 ft roll

Adhesive type: N/A

Cycle life: Low

Suggested mating component: HI-GARDE® Hook 46









Specialty Hook & Loop Woven





VELCRO® Brand VEL-LOC® 87S

Automotive, apparel, shoes, bags.

Base material: Polypropylene mushroom Hook


Standard colors: Black, white Standard widths (inches): 1, 1-1/2, 2Standard put-ups (yards): 50 yd roll

Adhesive type: 15 Cycle life: Medium / Low

Suggested mating component: Loop 1000







VELCRO® Brand

VELTEX® Laminated Loop

Exhibits, tradeshow displays, POP.

Base material: Nylon knit fabric, polyester / polyurethane foam, nylon tricot back fabric

Standard colors: Black (803), white (819), eggshell (818), beige (817), pink (822), spanish red (813), par green (834), jungle green (814), ice blue (806), royal blue (807), navy (805), purple (839), sterling (800), platinum (820), antique grey (821)

Standard widths (inches): 60

Standard put-ups (yards): 40 yd roll

Adhesive type: N/A Cycle life: Medium

Suggested mating component: Hook 88

































Specialty Hook & Loop Hardware

VELCRO® Brand VELSTICK®

Automotive headliners, attaching cushions, mounting gym wall mats.

Base material: Nylon, polyester, polypropylene

Standard colors: Black

Standard widths (inches): $1,\,1\text{-}3/4$

Standard put-ups (yards): 4ft lengths, 500 ft rolls

Adhesive type: N/A

Cycle life: High

Suggested mating component: Can be riveted, stapled or nailed









Straps







VELSTRAP®, Facestrap, Backstrap, Cinch Straps





Cable mangement, tourniquets, packaging, automotive accessories, wrapping, cinching, bundling.

Base material: Nylon / Polyester
Standard colors: Black, white

Standard widths (inches): 1, 2

Standard put-ups (each): Custom fabrication available

Adhesive type: N/A
Cycle life: High / Medium

Suggested mating component: Hook 88, Loop 1000





VELCRO® Brand

LOGISTRAP™

Pallet fastening, warehouse management, fastening systems.

Base material: Nylon

Standard colors: Blue, orange

Standard widths (inches): 2

Standard put-ups (yards): 2" x 16' or 2" x 23'

Adhesive type: None

Cycle life: High

Suggested mating component: Self-engaging









Straps





Retail Packs







STICKY BACK 5/8" Coins

Ideal for smooth surfaces and can be used indoors or outside.

Standard colors: Black, white Standard widths (inches): 5/8

Quantity per box: 15 sets





STICKY BACK 15' x 3/4" Tape

Ideal for smooth surfaces and can be used indoors or outside.

Standard colors: Black

Standard widths (inches): $\ensuremath{3/4}$

Quantity per box: 1 / pack, 1 / 12





STICKY BACK 15' x 3/4" Tape

Ideal for smooth surfaces and can be used indoors or outside.

Standard colors: White

Standard widths (inches): 3/4

Quantity per box: 1 / pack, 1 / 12





INDUSTRIAL STRENGTH 15' x 2" Tape

Ideal for smooth surfaces and can be used indoors or outside.

Standard colors: Black

Standard widths (inches): 2

Quantity per box: 1 / pack





VELCRO® Brand

INDUSTRIAL STRENGTH 15' x 2" Tape

Ideal for smooth surfaces and can be used indoors or outside.

Standard colors: White

Standard widths (inches): 2

 $\textbf{Quantity per box:} \ 1 \ / \ \mathsf{pack}$





VELCRO® Brand

ONE-WRAP® Thin Ties 8" x 1/2"

Perfect for cables. Reusable ties for heavier-duty indoor and outdoor use.

Standard colors: Black, gray

Standard widths (inches): $1 \ / \ 2$

Quantity per box: 50 ct







ONE-WRAP® Thin Ties 8" x 1/2"

Reusable ONE-WRAP® Ties are great for bigger projects.

Standard colors: Black, white
Standard widths (inches): 1/2

Quantity per box: 100 ct





VELCRO® Brand

INDUSTRIAL STRENGTH EXTREME 10' x 1" Tape

Extreme strength fasteners for rough surfaces.

Standard colors: Titanium
Standard widths (inches): 1

Quantity per box: 1/pack





Please inquire about our full line of Retail Products.





FASTENation, Inc.

Corporate Office / Manufacturing Facility 120 Brighton Road, Unit 2 Clifton, NJ 07012 USA

Sales Office 234 Seven Farms Dr Suite 213 Daniel Island, SC 29492 USA

Phone:1 (800) 876-9922 Fax:1 (800) 758-5424 E-Mail: sales@fastenation.com

International Callers: Phone: 1 (973) 591-1277 Fax: 1 (973) 591-1443 VELCRO INDUSTRIES TOGETHER COMPRISE A TECHNOLOGY-DRIVEN, GLOBAL ORGANIZATION PROVIDING FASTENING SOLUTIONS THAT SOLVE PROBLEMS IN SIMPLE, ELEGANT AND SURPRISING WAYS FOR BUSINESSES AND CONSUMERS AROUND THE WORLD.

WITH MORE THAN 50 YEARS OF EXPERIENCE, VELCRO INDUSTRIES IS PROUD OF OUR HERITAGE IN INNOVATION. VELCRO INDUSTRIES B.V. OWNS OVER 400 ACTIVE PATENTS AND NUMEROUS TRADEMARKS, INCLUDING THE VELCRO® MARK WHICH IS REGISTERED THROUGHOUT THE WORLD.



Velcro.com

ISO 9001 ISO 14001 ISO 13485 ISO/TS 16949